

POLY ARJ60P


- 240W
- 245W
- 250W
- 255W
- 260W

Salt & Amonia
Resistance

PID
Free


Technical Advantages

- Power tolerance 0~+5W
- Certificates
 - ✓ Safety class II
 - ✓ IEC61215
 - ✓ IEC61730
- Increased snow load to 5400pa

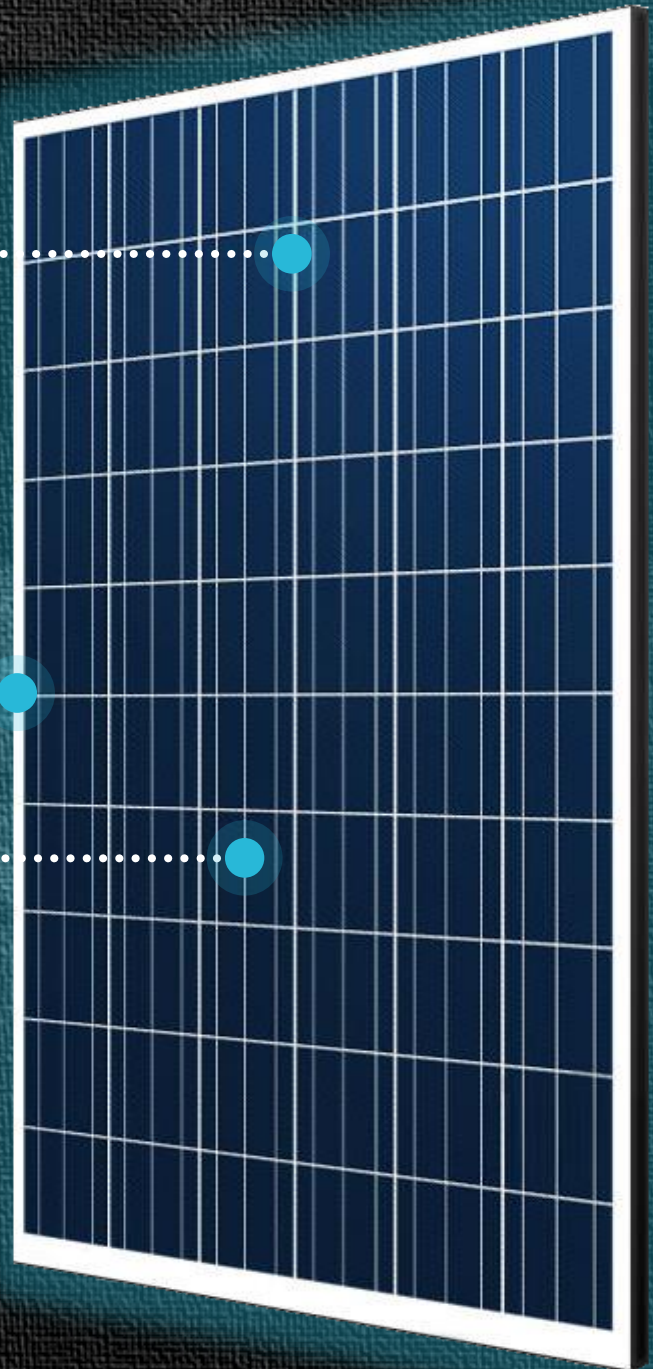


Practical Module Conversion Efficiency **17.81%**



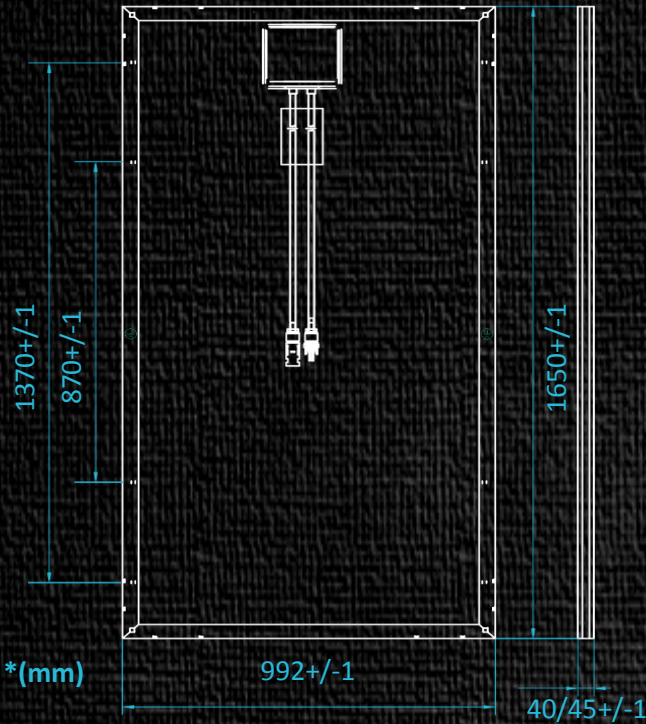

V-I Curve

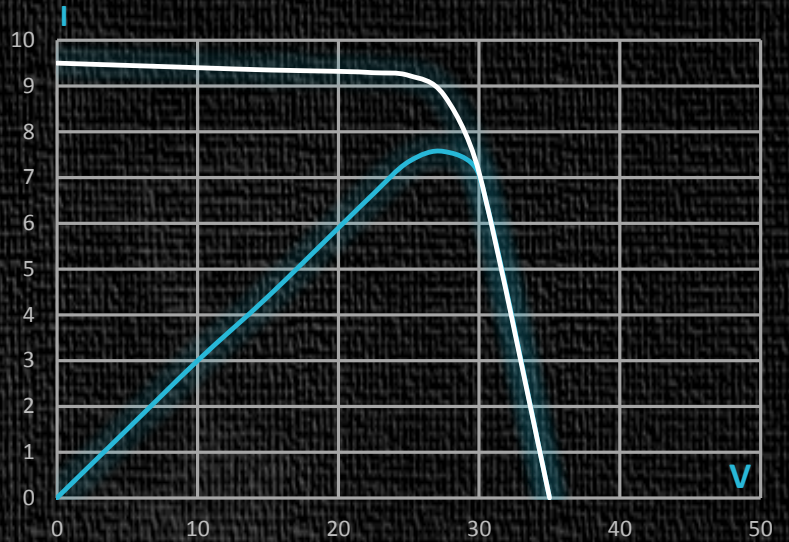

- Irradiance: 1000W/m²
- Test temperature : 25°C
- Am 1.5

Module type	260W	255W	250W	245W	240W
Cell type	156mm x 156mm				
Number of cells	6 x 10pcs				
Dimensions	1650 x 992 x 40/45mm – 64.96 x 39.06 x 1.57/1.77 inch				
Peak Power (P_{max})	260W	255W	250W	245W	240W
Module Efficiency	15.88%	15.58%	15.27%	14.97%	14.66%
Partial Module Efficiency	17.81%	17.46%	17.12%	16.78%	16.44%
Power Tolerance	0 ~+ 5W				
Open Circuit Voltage (V_{oc})	37.9V	37.8V	37.6V	37.4V	37.2V
Short Circuit Current (I_{sc})	8.85A	8.83A	8.81A	8.69A	8.56A
Maximum Power Voltage (V_{mp})	31.5V	30.9V	30.4V	30.2V	30.0V
Maximum Power Current (I_{mp})	8.26A	8.25A	8.23A	8.12A	8.01A
Maximum System Voltage	DC1000V				
Operating Temperature	-40°C ~85°C				
Nominal Operating Cell Temp	47 +/- 2°C				
Temp. Coefficient I_{sc} (TK I_{sc})	0.06%/°C				
Temp. Coefficient V_{oc} (TK V_{oc})	-0.34%/°C				
Temp. Coefficient Power (TK P_{max})	-0.42%/°C				
Series Fuse Rating	15A				
Number of Bypass Diode	3/6				
Weight	19.0/19.5 kg – 41.89/42.99 lbs				
Packing	25/23pcs x 1 Carton/Pallet				
Transportation	700/644pcs/40ft Container				

- Potential Induced Degradation (PID) free
- High Salt and Ammonia Resistance Certified by TUV
- 10 years product Warranty

Dealer:

