SOLAR LIGHT


SERIES OLD. 0-6M - 25W LED

SPECIFITATIONS

SPECIFIATIONS		
Solar panel	Perfomance	80W Solar panel
	Seal	Encapsulated with tempered glass
	Service life	25 years
Battery	Туре	Lithium iron batteries
	Voltage/Capacity	3V/120Ah
	Service life	Over 10 years
Light source	Туре	Pure led
	Power	25W
	Service life	50.000 hours
Light body	Lamp cover	Glass with weatherability
	Pole	Aluminium with plastic coating
	Height	Up to 6M
Installation	Solar panel tilt fixed installation, the angle of solar panel and level is equal to local dimension plus 5° - 15°	
	Solar panel must be installed on sunshine position, the surface of solar panel must not be covered by anithing or shadow, only in this situation, it can work well, otherwise working time will be reduced according to the covering time	
Lighting time	4+X: Pre 4 hours lighing 24W, the rest night lighting 12W	
Container	40ft	140 sets





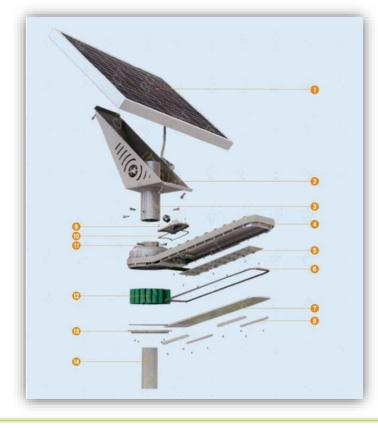

PART DESCRIPTION		
N°	Name	
1	Solar panel	
2	Stiffened Plate Bracket	
3	Cylinder	
4	Lamp Holder	
5	Lamp Panel	
6	Sealing Ring	
7	Transparent Glass	
8	Pressure Panel	
9	Terminal Cover	
10	Sealing Ring	
11	Cylinder Flange	
12	Lithium Iron Batteries	
13	End Cap for Bottom Bar	
14	Light Pole	